



Square Interlocks 定位块

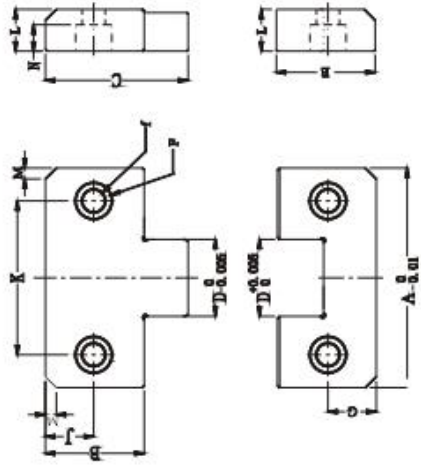



Code	A	B	C	D	F	f	K	J	G	M	L	N	E
PL 38	38	22	30	12	11	6.5	22	7	7	5	13	8	22
PL 50	50	21.5	30	17	11	6.5	34	11	11	5	16	8	22
PL 75	75	36	50	25	17	11	50	18	18	8	19	12	36
PL 100	100	45	65	35	17	11	70	22	22	10	19	12	45
PL 125	125	45	65	45	17	11	84	22	22	10	25	12	45

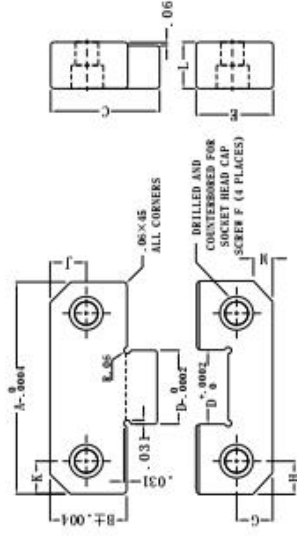

Code	A	B	C	D	E	S.H.C.S	G	H	J	K	L	M
PPLM/PPLF/0001	1.500	.870	1.18	.500	.870	1/4-20 X3/4	.281	.281	.437	.281	.620	.19
PPLM/PPLF/0002	2.000	.870	1.18	.680	.870	1/4-20 X3/4	.375	.375	.437	.375	.620	.19
PPLM/PPLF/0003	3.000	1.360	1.910	1.000	1.370	3/8-16 X1	.688	.375	.688	.375	.745	.19
PPLM/PPLF/0004	4.000	1.870	2.640	1.375	1.870	3/8-16 X1	.875	.625	.875	.625	.745	.50
PPLM/PPLF/0005	5.000	1.870	2.640	1.750	1.870	1/2-13 X11/4	.875	.750	.875	.750	1.120	.50




Square Interlocks 定位块

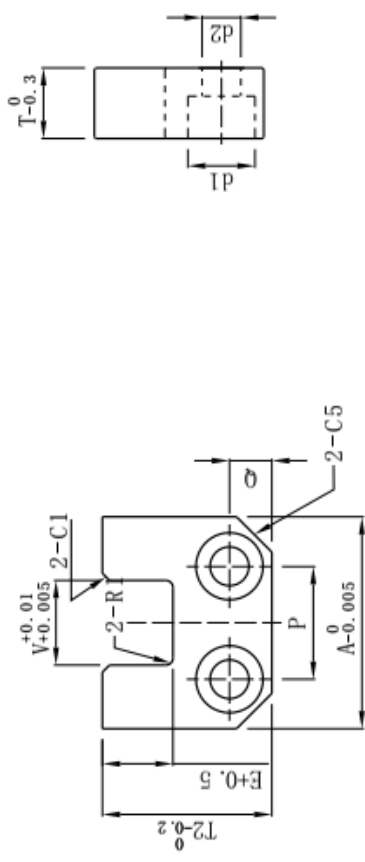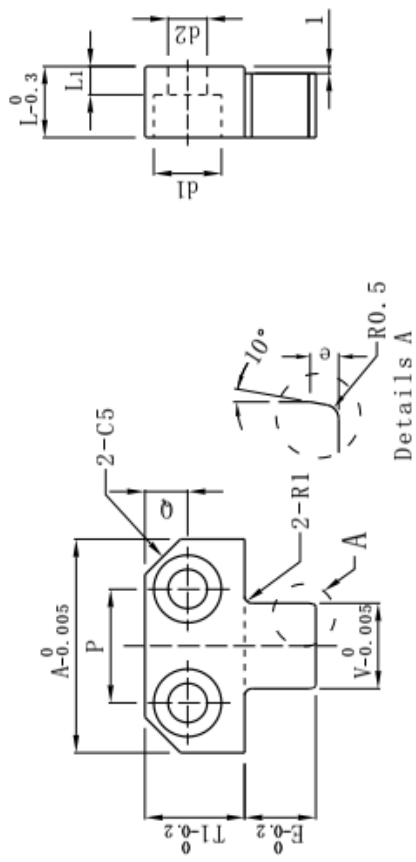


Code	A	E	V	T	T1	T2	e	R1	C1	螺栓孔 Bolt hole				安装螺栓 Mounting bolt	L	L1
										P	Q	d1	d2			
TTSSB	20	6	8	29	11	17	1	1	0.5	-	5	8	4.5	M4	8	3
	30	8	12	37	14	22	1	1	0.5	16	6	9.5	5.5	M5	10	4
	30	20	12	49	14	34	2	2	1	16	6	9.5	5.5	M5	10	4
	40	10	15	47	18	28	1	1	0.5	22	7	11	6.6	M6	13	6
	40	25	15	62	18	43	2	2	1	22	7	11	6.6	M6	13	6
	60	20	25	81	30	50	2	2	1	36	12	14	8.6	M8	20	11
	60	35	25	96	30	65	2	2	1	36	12	14	8.6	M8	20	11
	80	30	30	111	40	70	2	2	1	52	14	18	11	M10	25	14
	80	45	30	126	40	85	2	2	1	52	14	18	11	M10	25	14

Square Interlocks 定位块

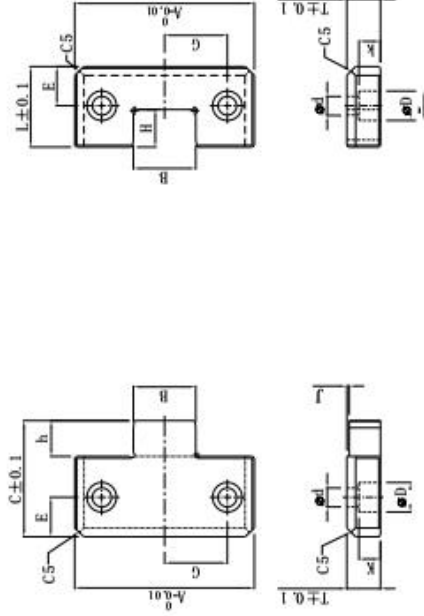

Code	Size													
	A	B	C	D	d	E	G	h	H	J	K	L	T	
USSI 50	50	17	30	10.5	6.5	11	17	8.5	9.5	1.5	8	21.5	16	M6 15
USSI 75	75	25	50	16.5	10.5	18	25	14	15	1.5	12	36	19	M10 20
USSI 100	100	35	65	16.5	10.5	22	35	20	21	1.5	12	45	19	M10 20
USSI 125	125	45	65	16.5	10.5	22	42	20	21	1.5	12	45	25	M10 20

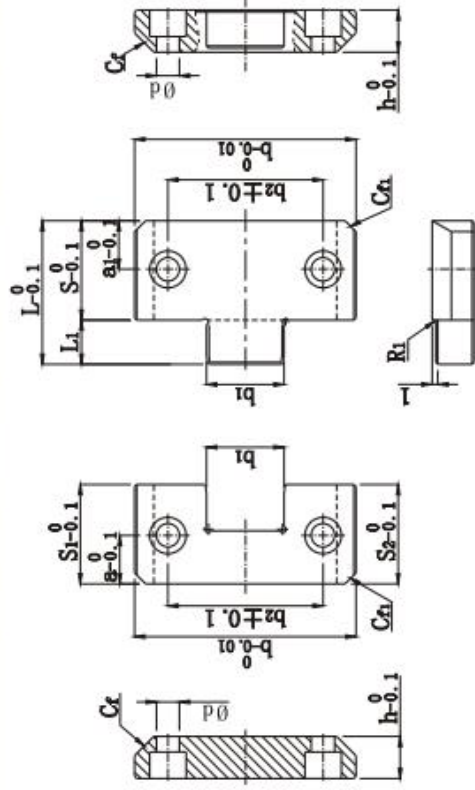

Code	b	a	a1	b1	b2	d	Cf	f1	h	L	L1	S	S1	S2	R
UFW45-40	40	6	8.5	14	22	M5	6.5X45°	2.5X45°	10	31	14	17	12	27	6.5
UFW45-50	50	8.5	8.5	20	32	M6	6.5X45°	3.0X45°	12.5	35	18	17	17	36	6.5
UFW45-75	75	11	11	31.5	45	M10	11X45°	3.0X45°	20	45	23	22	22	46	11
UFW45-100	100	13.5	13.5	40	62	M12	13X45°	5.0X45°	25	55	28	27	27	56	13
UFW45-125	125	18	18	50	87	M12	13X45°	5.0X45°	31.5	65	29	36	36	66	13


Square Interlocks 定位块



KY100 KY150








KY50

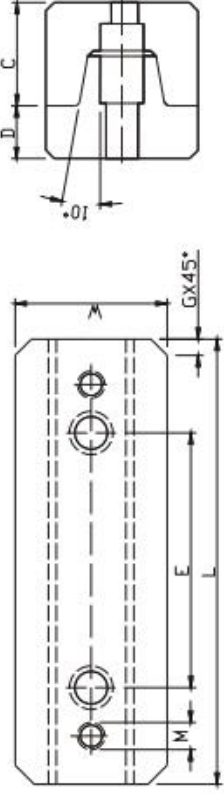

Code	L	E	W	D	C	G	M
KY-50	50	—	25	8	17.5	5	M5
KY-100	100	60	30	10	22	5	M6
KY-150	150	100	40	13	25	5	M8





Code	E	L	W	C ±	D	安装螺丝 S.H.C.S
FFTR/MMTR-08-2	—	1.980	.999	.69	.312	NO.10-24
FFTR/MMTR-10-4	2.500	3.980	1.249	.87	.375	1/4-20
FFTR/MMTR-12-6	4.000	5.980	1.499	1.00	.500	5/16-18

Square Interlocks 定位块

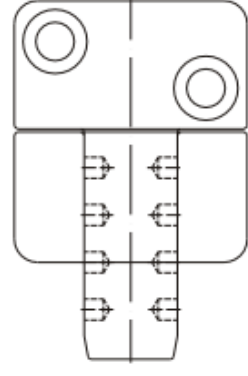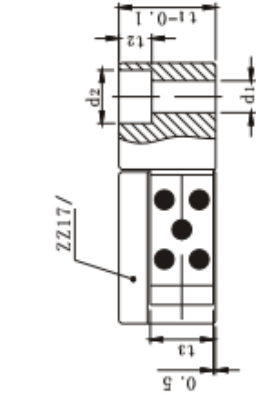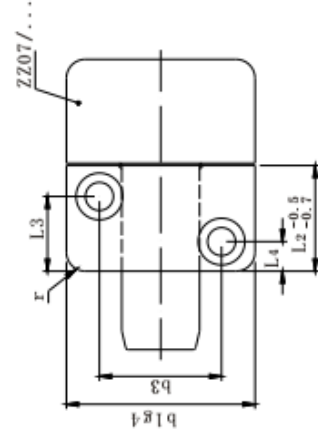



Type	Code		r	t ₃	t ₂	t ₁	d ₂	d ₁	L ₄	L ₃	b ₁	b ₃	b ₁
	L ₂	No. L ₁ b ₂											
UZ07/17	22	20 40	6	11	6.8	20	11	6.6	7	15	40	26	40
	27	25 50	6	13	6.8	22	11	6.6	7	19	45	31	45
	36	32 63	8	14	6.8	25	11	6.6	9	27	50	35	50
	46	40 80	8	19	9.0	32	15	9.0	11	35	63	45	63
	56	50 100	10	22	11.0	36	18	11.0	15	40	85	60	85
	66	56 112	10	24	13.0	40	20	14.0	18	48	100	74	100

Square Interlocks 定位块

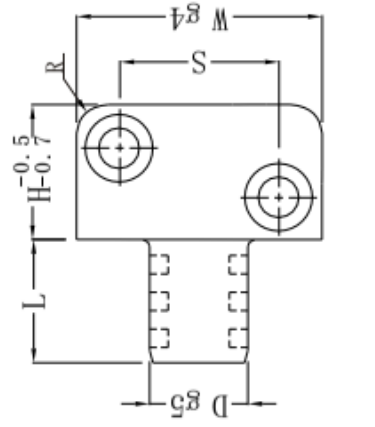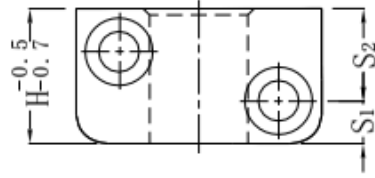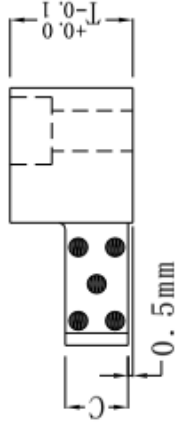




Code		Size 尺寸										
		L	D	T	W	C	H	S ₁	S ₂	S	R	螺丝 Screws
SSLPM 16X20		20	16	20	40	11	22	7	15	26	6	M6-1.0 25
SSLPM 16X40		40	16	20	40	11	22	7	15	26	6	M6-1.0 25
SSLPM 20X25		25	20	22	45	13	27	7	19	31	6	M6-1.0 25
SSLPM 20X50		50	20	22	45	13	27	7	19	31	6	M6-1.0 25
SSLPM 25X32		32	25	25	50	14	36	9	27	35	8	M6-1.0 30
SSLPM 25X63		63	25	25	50	14	36	9	27	35	8	M6-1.0 30
SSLPM 32X40		40	32	32	63	19	46	11	35	45	8	M8-1.25 35
SSLPM 32X80		80	32	32	63	19	46	11	35	45	8	M8-1.25 35
SSLPM 40X50		50	40	36	85	22	56	15	40	60	10	M10-1.5 40
SSLPM 40X100		100	40	36	85	22	56	15	40	60	10	M10-1.5 40
SSLPM 50X56		56	50	40	100	24	66	18	48	74	10	M12-1.75 45
SSLPM 50X112		112	50	40	100	24	66	18	48	74	10	M12-1.75 45

Pre-centering Units 定位锁

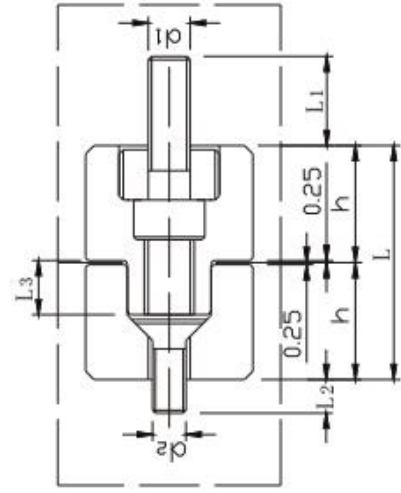


Code											
Type	NO.			r	d1	d2	L1	L2	L3	L	h
		a	b								
UZ08/20-20		20	20	4	M5	M4	12	4	3.5	28	14.0
UZ08/25-25		25	25	5	M6	M5	13	8	5.5	32	16.0
UZ08/32-32		32	32	6	M8	M6	15	12	7.5	36	18.0
UZ08/40-40		40	40	6	M10	M8	17	10	9.5	45	22.5

Round locating units 定位柱





		Size 尺寸									
Code		t	d4	d	L5	L4	L3	L2	L1	S1	d3
		5	4	M10	16.5	4.5	20	11.5	10.5	36	30
UZ06/30											
UZ06/42		7	5	M10	18.5	5.5	20	15.5	14.5	46	42
UZ06/54		8	6	M12	20.5	7.5	25	18.5	17.5	56	54
UZ06/80		11	8	M16	25.5	7.5	30	28.5	27.5	76	80

Round Locating Units定位柱

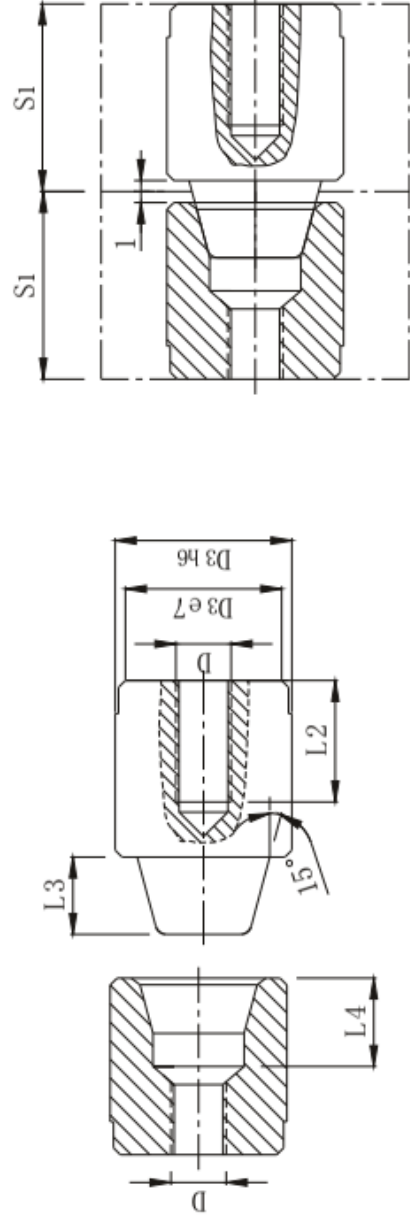

Code	D3	L4	L3	L2	D	S1
UZ05/12	12	8	5	10	M4	17
UZ05/14	14	8	7	11	M5	17
UZ05/16	16	8	7	11	M5	17
UZ05/20	20	13	10	15	M8	27
UZ05/25	25	13	11	15	M8	27
UZ05/26	26	13	10	15	M8	27
UZ05/30	30	20	14	18	M10	36
UZ05/32	32	20	14	18	M10	36
UZ05/42	42	25	18	18	M10	46

Round Locating Units定位柱

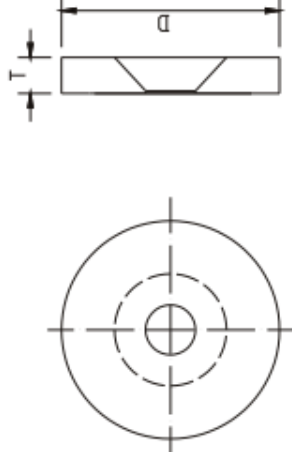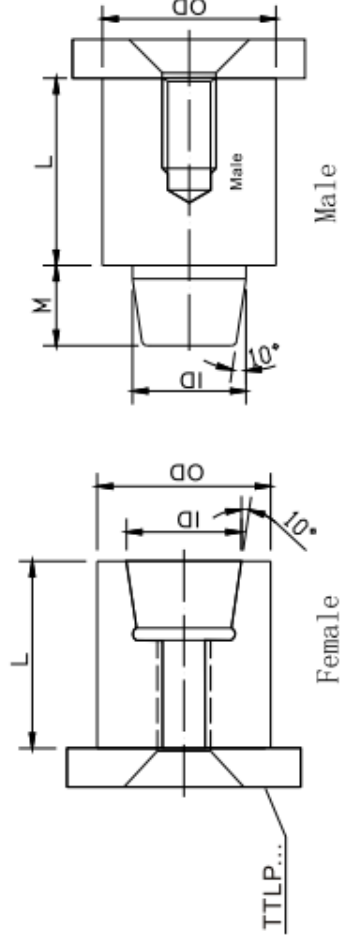


Taper lock plates

Code	Size			沉头螺丝 C' bore F.H.C.S
	O.D.	D	T	
TTLP50	1/2	.687 +.000 -.015	.187 +.000 -.002	#10-24
TTLP75	3/4	1.000	.187	1/4-20
TTLP100	1	1.187	.187	1/4-20
TTLP150	1-1/2	1.687	.250	5/16-18
TTLP200	2	2.187	.250	5/16-18


销(Male)	套(Female)	O.D. +.0000 -.0003	I.D.	M	Tap Size	L +.004 -.008
MMTL50L.68	FFTL50L.68	1/2	.312	.250	#10-24	11/16
MMTL50L.87	FFTL50L.87					7/8
MMTL50L.118	FFTL50L.118					1-3/16
MMTL50L.137	FFTL50L.137	3/4	.500	.281	1/4-20	1-3/8
MMTL75L.68	FFTL75L.68					11/16
MMTL75L.87	FFTL75L.87					7/8
MMTL75L.118	FFTL75L.118	1	.625	.343	5/16-18	1-3/16
MMTL75L.137	FFTL75L.137					1-3/8
MMTL100L.68	FFTL100L.68					11/16
MMTL100L.87	FFTL100L.87	1-1/2	1.000	.500	5/16-18	7/8
MMTL100L.118	FFTL100L.118					1-3/16
MMTL100L.137	FFTL100L.137					1-3/8
MMTL150L.112	FFTL150L.112	2	1.500			1-1/8
MMTL150L.137	FFTL150L.137					1-3/8
MMTL150L.162	FFTL150L.162					1-5/8
MMTL200L.112	FFTL200L.112					1-1/8
MMTL200L.137	FFTL200L.137					1-3/8
MMTL200L.162	FFTL200L.162					1-5/8

Centring Elements 定位块

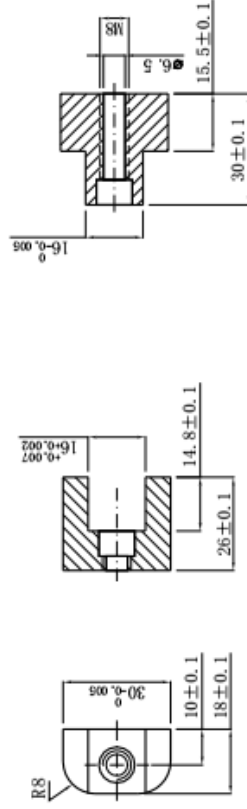




Code

UZ50-0

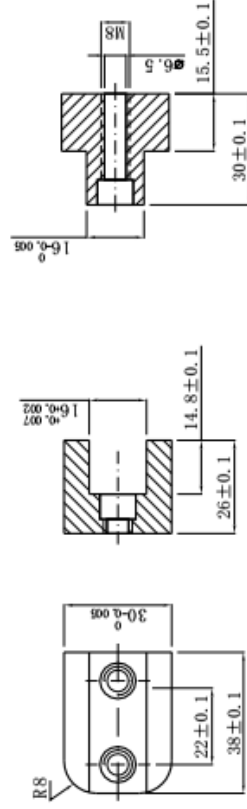

Code


UZ50-1



ZZ50-2/3

Code	B1	B2	B3	t1	t2	t3	t4	L1	D1	D2
UZ50-2	20	50	35	29,8	20	48,8	29,8	38	6,5	M8
UZ50-3	30	75	52	39,8	25	63,8	39,8	38	8,3	M10

Centring Elements 定位块

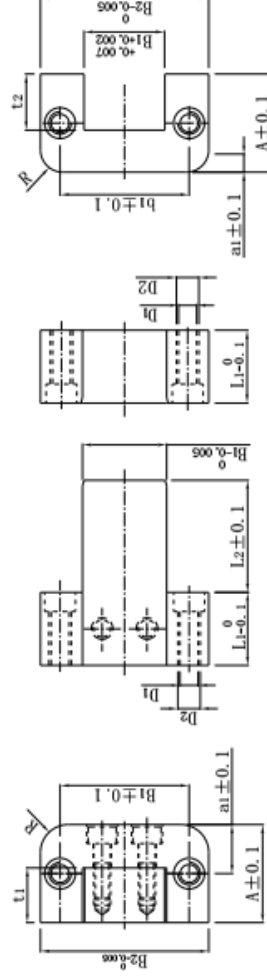

- 1、此定位块属于精密无锥度定位块，有效解决侧装式0°定位块槽加工困难的问题，尤其对大型模胚更具方便性；
- 2、在型芯嵌入型腔前对其进行定位，有防止型芯磨损和损坏；
- 3、在模板上开槽进行安装，因配合间隙很小，请配套使用精密导柱；
- 4、在安装时，定位块的两个凹块接触面之间至少保留1MM左右的间隙，以防止合模时发生碰撞，造成定位块损坏；ZZ46与ZZ48安装方法相同；
- 5、配有ZZ46带油槽、ZZ48带石墨两种款式，能有效减小摩擦力，防止烧伤提高使用寿命；
- 6、凸块的可拆卸式精密设计，维护时更方便、更节约成本；
- 7、定位块我司不配安装螺丝；




1. This ZZ46 interlock is precision No-tapered and inlaying installed, solve the problem that position of 0° interlocks hard to machine. Many sizes are available, wide applicability.
2. Position it before mould core insert to the mould cavity, to against the wear and damage of the mould core.
3. To cut a groove to mount it, please use the matched precision guide pins for the fit clearance is small.
4. When assemble, keep a space 1mm between the surface of ♀female and ♂male parts. ZZ46 is the same as ZZ48 for installation.
5. The processed the oil grooves for ZZ46 and graphite dots for ZZ48, reduce the friction and avoid the damaged.
6. female parts are available to disassemble, easy to Maintenance and save the cost.
7. Note that our company don't offer the mounting screws, please use the mounting screws that came with the ZZ46 and ZZ48

Code	Size 尺寸											
	B1	L1	L2	A	B2	D1	D2	a1	b1	t1	t2	R
UZ46	16	20	20	22	45	6.4	M8	11	30	11.5	12	8
	16	20	40	22	45	6.4	M8	11	30	11.5	12	8
	30	26	40	35	60	6.4	M8	17.5	46	19.5	20	10
	30	26	63	35	60	6.4	M8	17.5	46	19.5	20	10
	48	36	32	46	100	10.3	M12	23	74	25.5	26	12.5
	48	36	50	46	100	10.3	M12	23	74	25.5	26	12.5
	48	36	63	46	100	10.3	M12	23	74	25.5	26	12.5
	48	36	80	46	100	10.3	M12	23	74	25.5	26	12.5
	77	56	50	60	150	12.8	M16	30	114	35.5	36	16
	77	56	71	60	150	12.8	M16	30	114	35.5	36	16
77	56	100	60	150	12.8	M16	30	114	35.5	36	16	




Centring Elements 定位块

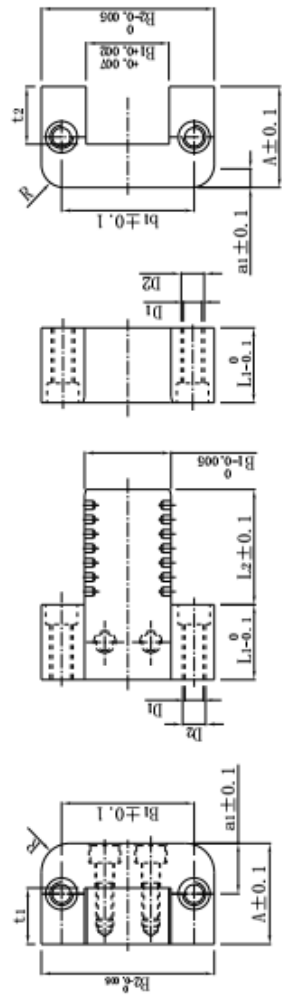


Code	B1	L1	L2	A	B2	D1	D2	a1	b1	t1	t2	R
	16	20	20	22	45	6,8	M8	11	30	11,5	12	8
	16	20	40	22	45	6,8	M8	11	30	11,5	12	8
	30	26	40	35	60	6,8	M8	17,5	46	19,5	20	10
	30	26	63	35	60	6,8	M8	17,5	46	19,5	20	10
	48	36	32	46	100	10,3	M12	23	74	25,5	26	12,5
	48	36	50	46	100	10,3	M12	23	74	25,5	26	12,5
	48	36	63	46	100	10,3	M12	23	74	25,5	26	12,5
	48	36	80	46	100	10,3	M12	23	74	25,5	26	12,5
	77	56	50	60	150	14	M16	30	114	35,5	36	16
	77	56	71	60	150	14	M16	30	114	35,5	36	16
	77	56	100	60	150	14	M16	30	114	35,5	36	16


U248

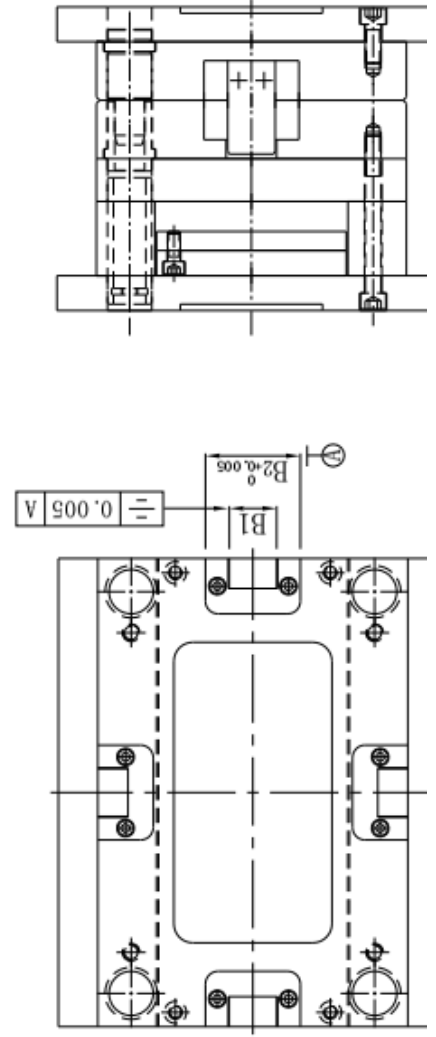


X-style straight side interlocks多板定位块

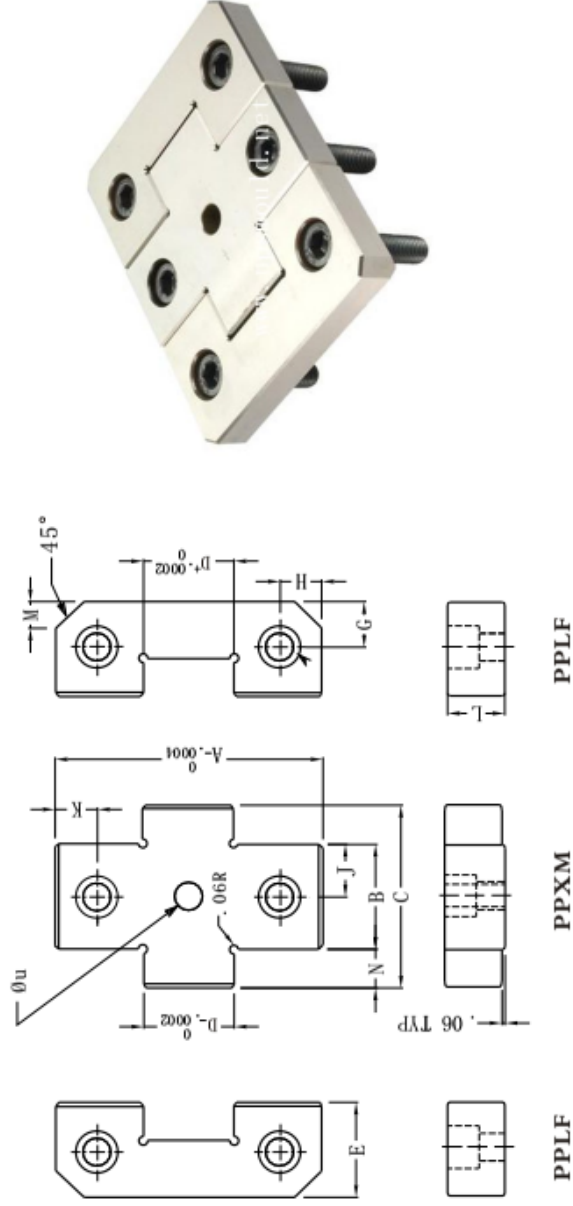

Code			Size 尺寸														
			A		B	C	D	E	安装螺丝 S.H.C.S	G	H	J	K	L	M	N	U
FEMALE	X-STYLE																
PPLF-0001 (2REQ' D.)		PPXM-1001	1.5000	.850	1.470	.5000	.870	1/4-20 3/4	.281	.281	.425	.281	.620	.19	.310	.2500	
		PPXM-2001	1.5000	1.350	1.970	.5000	.870	1/4-20 3/4	.281	.281	.675	.281	.620	.19	.310	.2500	
PPLF-0002 (2REQ' D.)		PPXM-1002	2.0000	.850	1.470	.6800	.870	1/4-20 3/4	.375	.375	.425	.375	.620	.19	.310	.2500	
		PPXM-2002	2.0000	1.350	1.970	.6800	.870	1/4-20 3/4	.375	.375	.675	.375	.620	.19	.310	.2500	
PPLF-0003 (2REQ' D.)		PPXM-1003	3.0000	.850	1.950	1.0000	1.370	3/8- 16 1	.688	.375	.425	.375	.745	.19	.550	.3750	
		PPXM-2003	3.0000	1.350	2.450	1.0000	1.370	3/8-16 1	.688	.375	.675	.375	.745	.19	.550	.3750	
PPLF-0004 (2REQ' D.)		PPXM-2004	4.0000	1.350	2.890	1.3750	1.870	3/8-16 1	.875	.625	.675	.625	.745	.50	.770	.3750	
		PPXM-3004	4.0000	1.850	3.390	1.3750	1.870	3/8-16 1	.875	.625	.925	.625	.745	.50	.770	.3750	
PPLF-0005 (2REQ' D.)		PPXM-2005	5.0000	1.350	2.890	1.7500	1.870	1/2-13 1/4	.875	.750	.675	.750	1.120	.50	.770	.5000	
		PPXM-3005	5.0000	1.850	3.390	1.7500	1.870	1/2-13 1/4	.875	.750	.925	.750	1.120	.50	.770	.5000	



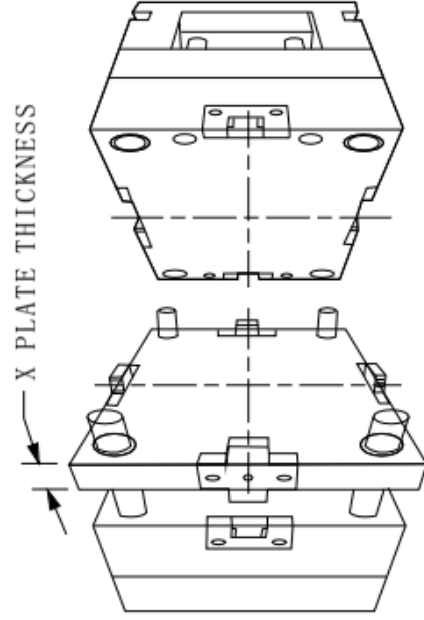


Round Locating Units 圆形定位柱

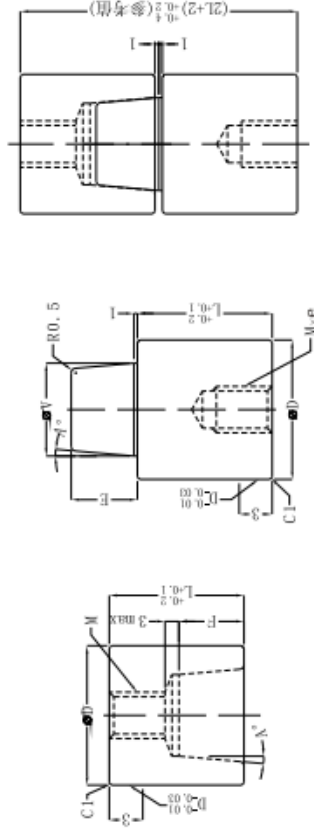

注: 另有型号TLP-30/32/35/42规格
Notes: Other diameters of TLP 30/32/35/42 are available

Code		Size									
Type	D(直径Dia.)	A	D	L	V	E	F	Dks	M×e		
TLP-13	13	5	13	14	8.5	6	5	+0.012	M4×10		
TLP-16	16	5	16	14	10	6	5	+0.001	M5×10		
TLP-20	20	5	20	19	13	9	8	+0.015	M6×12		
TLP-25	25	5	25	24	16	12	11	+0.002	M8×16		
TLP-30	30	5	30	29	20	15	14	+0.002	M8×20		




Code	Size									
	φ d	φ D	L1	L2	L3	N	e	S	M	
TTP-14	14	20 +0.03 +0.02	43±0.05	30	25	15	15	5	8	
TTP-16	16	25 +0.03 +0.02	52±0.05	41	25	24	17	6	10	
TTP-20	20	30 +0.03 +0.02	62±0.05	49	30	29	20	8	10	
TTP-25	25	35 +0.03 +0.02	72±0.05	59	35	34	25	8	10	

Round Locating Units 圆形定位柱





*组装时的尺寸



Dimensions when combined



Reference values
(2L+2)^{+0.4}_{+0.2} (参考值)



Code	直径 Dia. D	公差 Tolerance Dk6		A°	@ ¥/S (税前价)	Code	Dia. D	Tolerance Dk6		A°
		D	Dk6					D	Dk6	
TTPNC	13	+0.012	+0.001	1° 3° 5°		-	10	+0.010	+0.001	1° 3° 5°
	16	+0.012	+0.001	1° 3° 5°			13	+0.012	+0.001	1° 3° 5°
	20	+0.015	+0.002	1° 3° 5°			16	+0.012	+0.001	1° 3° 5°
	25	+0.015	+0.002	1° 3° 5°			20	+0.015	+0.002	1° 3° 5°
	30	+0.015	+0.002	1° 3° 5°			25	+0.015	+0.002	1° 3° 5°
						TTPN	30	+0.015	+0.002	1° 3° 5°

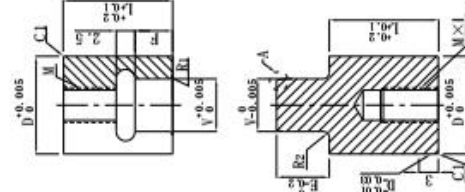





开始定位时，合模时



Code	D	E	M	e	V	R1	R2	S	F	L	@ ¥/S (税前价)
TTPNF	13	7	4	10	7	0.5	0.8	4.5	5	14.5	
	13	13	4	10	7	0.5	0.8	10.5	11	24.5	
	16	7	5	10	10	0.5	0.8	4.5	5	14.5	
	20	11	6	12	13	0.5	0.8	8.5	9	19.5	
	25	13	8	16	16	0.5	0.8	10.5	11	24.5	
TTPNFC	16	7	4	XI0	M5	10	1.0	0.5	0.8	5	
	20	10	5	XI0	M6	13	1.0	0.5	0.8	6	
	25	12	6	XI2	M8	16	1.0	0.5	0.8	8	




Centring Elements 定位块

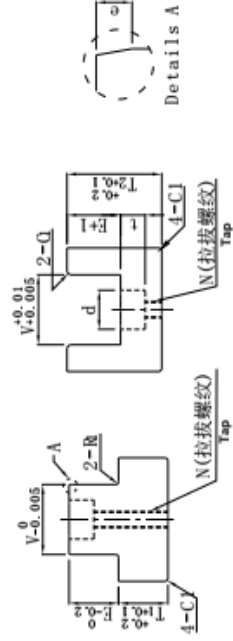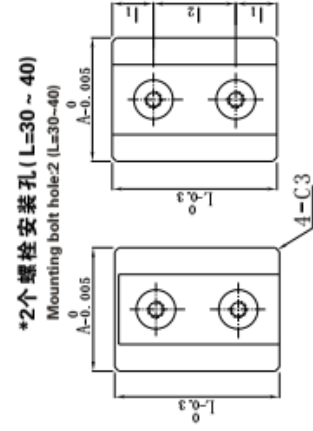


Code	A	L	E	V	T	T ₁	T ₂	e	R ₁	C ₁	螺栓孔 Bolt hole				安装螺栓 Mounting bolt	N	螺栓孔 数量 Bolt hole Qty
											l ₁	L	d	t			
TTBSF	16	16	8	9	26	8	17	1	0.5	0.5	-	-	-	-	M4	M4	1 (螺纹孔)
	16	20	8	9	26	8	17	1	0.5	0.5	-	-	-	-	M4	M4	1 (螺纹孔)
	20	25	8	12	26	8	17	1	0.5	0.5	-	-	6.5	3.5	M3	M4	1
	20	25	12	12	30	8	21	1	0.5	0.5	-	-	6.5	3.5	M3	M4	1
	20	30	8	12	26	8	17	1	0.5	0.5	7.5	15	6.5	3.5	M3	M4	2
	25	25	10	15	32	10	21	1	0.5	0.5	-	-	8	5	M4	M5	1
	25	30	10	15	32	10	21	1	0.5	0.5	7.5	15	8	5	M4	M5	2
	30	30	12	17	36	12	23	1	0.5	0.5	7.5	15	9.5	6	M5	M6	2
	30	40	12	17	36	12	23	1	0.5	0.5	10	20	9.5	6	M5	M6	2
	30	40	20	17	34	12	31	2	1	1	10	20	9.5	6	M5	M6	2


TTBSF-16




TTBSF-20/25/30



Centring Elements 定位块

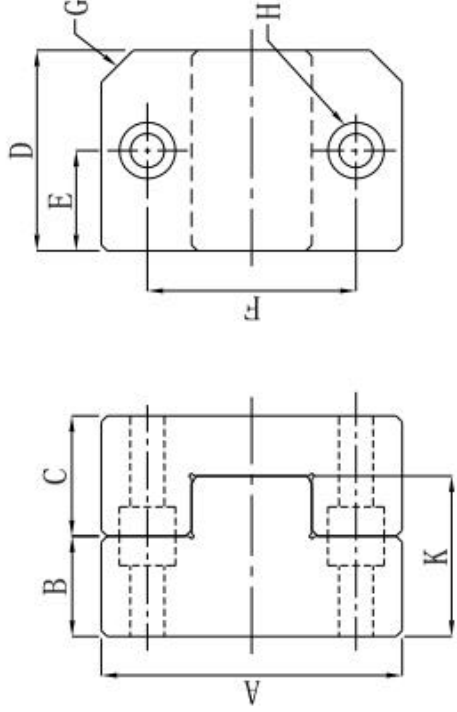


Code	A	B	C	D	E	F	G	H	K
DLM35	35	15	20	20	10	24	C3	M5	25
DLM50	50	20	25	25	12.5	34	C5	M6	30
DLM75	75	25	30	50	25	52	C8	M8	40

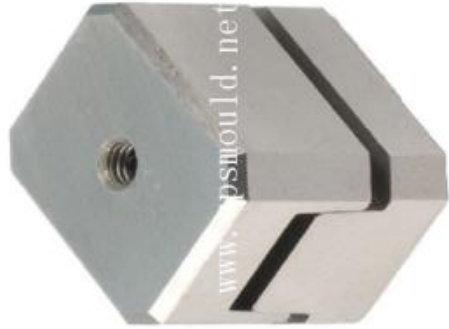


Centring Elements 定位块

2个螺丝安装孔 (L30-75)
Mounting bolt hole:2

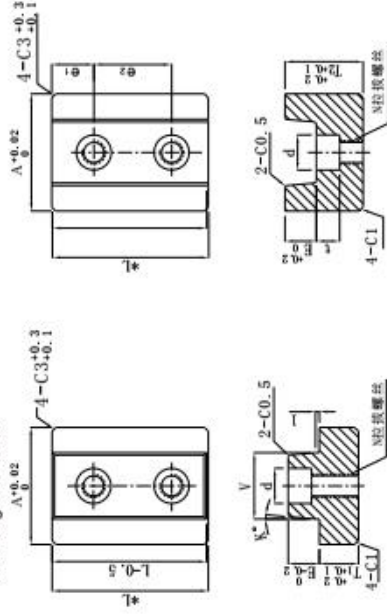



1个螺丝安装孔 (A16除外 L20-25)
Mounting bolt hole:1 (Except A16,

1个螺丝安装孔 (仅A16)
Mounting bolt hole:1 (Only A16)

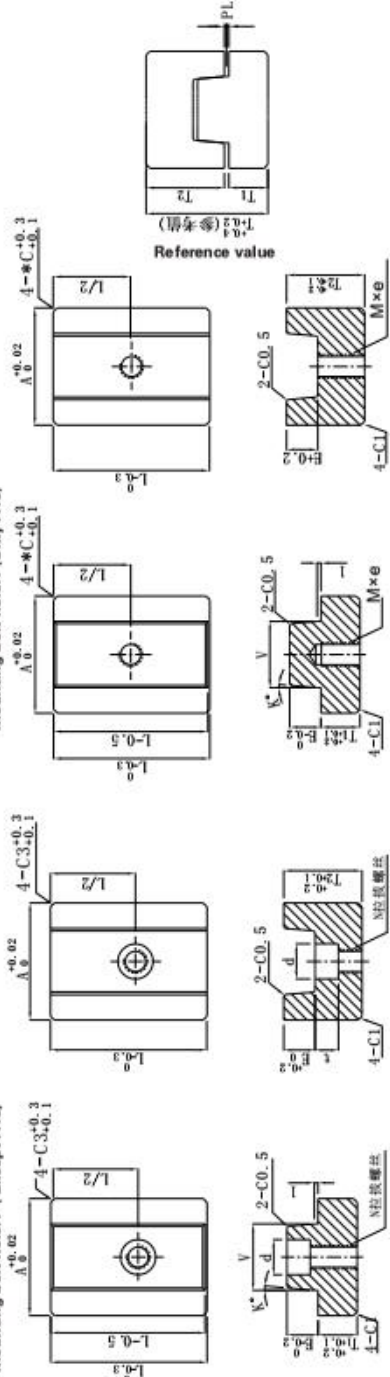


Code	Size 尺寸															Me (螺纹孔) M4×6	N 拉拔螺纹	螺栓孔数量 Bolt hole Qty
	A	L	K°	V	E	T	T1	T2	螺栓孔 Bolt hole				安装螺栓 Mounting bolt					
									e1	e2	d	t						
TTBS	16	20	1° 3' 5°	9	7	23	7	14	-	-	-	-	M4	M4	M4×6	-	1	
	20	25	1° 3' 5°	12	7	23	7	14	-	-	6.5	3.5	M3	M4	-	-	2	
	20	30	1° 3' 5°	12	7	23	7	14	7.5	15	6.5	3.5	M3	M4	-	-	2	
	25	25	1° 3' 5°	15	8	28	9	17	-	-	8	5	M4	M5	-	-	1	
	25	30	1° 3' 5°	15	8	28	9	17	7.5	15	8	5	M4	M5	-	-	2	
	25	40	1° 3' 5°	15	8	28	9	17	10	20	8	5	M4	M5	-	-	2	
	30	25	1° 3' 5°	17	8	32	10	20	-	-	9	6	M5	M6	-	-	1	
	30	30	1° 3' 5°	17	8	32	10	20	7.5	15	9	6	M5	M6	-	-	2	
	30	40	1° 3' 5°	17	8	32	10	20	10	20	9	6	M5	M6	-	-	2	
	35	40	1° 3' 5°	20	10	35	11	22	10	20	11	7	M6	M8	-	-	2	
	35	50	1° 3' 5°	20	10	35	11	22	10	30	11	7	M6	M8	-	-	2	
	45	40	1° 3' 5°	25	15	45	14	29	10	20	11	7	M6	M8	-	-	2	
	45	50	1° 3' 5°	25	15	45	14	29	10	30	11	7	M6	M8	-	-	2	
	45	75	3°	25	15	45	14	29	17.5	40	11	7	M6	M8	-	-	2	
	65	60	5°	35	20	60	19	39	15	30	14	9	M8	M10	-	-	2	

Centring Elements 定位块

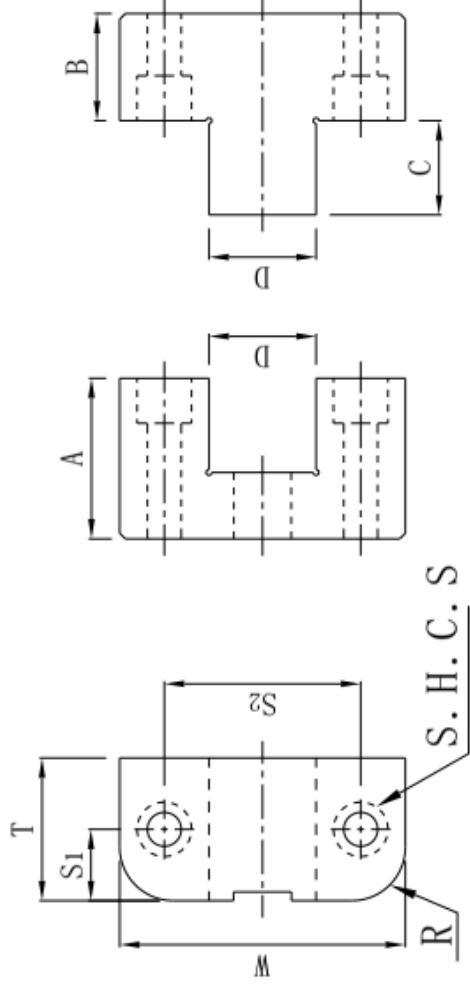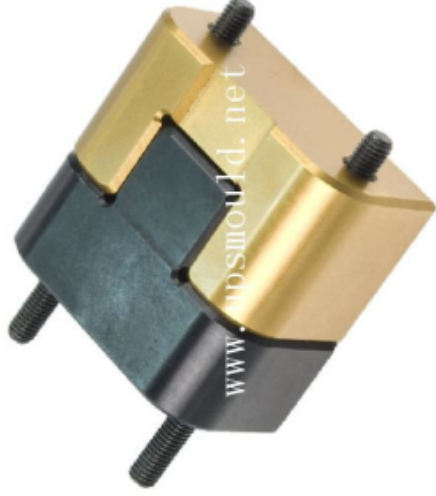

Code	Size 尺寸										安装螺丝 S.H.C.S
	W +.0000 -.0004	T +.000 -.0002	A +.000 -.0002	B +.000 -.0002	C .01	D .0001/.0002	S1 .01	S2 .01	R		
UTL62X125	1.250	.625	.625	.500	.41	.438	.312	.875	.250	M:#6-32 5/8" F:#6-32 3/4"	
UTL75X125	1.250	.750	.625	.500	.38	.438	.375	.875	.250	M:#8-32 5/8" F:#8-32 3/4"	
UTL87X150	1.500	.875	.875	.750	.53	.500	.437	1.000	.250	M:#8-32 7/8" F:#8-32 1"	
UTL100X150	1.500	1.000	.875	.375	.50	.500	.500	1.000	.250	M:#10-32 1/2" F:#10-32 1"	
UTL100X200	2.000	1.000	1.125	.750	.66	.750	.500	1.375	.375	M:#10-32 1" F:#10-32 1-1/8"	
UTL112X200	2.000	1.125	.875	.625	.50	.750	.563	1.375	.375	M:1/4-20 3/4" F:1/4-20 1"	
UTL112X300	3.000	1.125	1.500	.750	.78	1.125	.562	2.250	.500	M:1/4-20 7/8" F:1/4-20 1-5/8"	
UTL150X250	2.500	1.500	1.375	.625	.75	1.000	.750	1.750	.375	M:1/4-20 3/4" F:1/4-20 1-1/2"	
UTL175X300	3.000	1.750	1.250	.875	.75	1.125	.875	2.250	.500	M:5/16-18 1" F:5/16-18 1-1/4"	
UTL200X350	3.500	2.000	1.750	.750	1.00	1.500	1.000	2.500	.500	M:3/8-16 7/8" F:3/8-16 2"	

Centring Elements 定位块

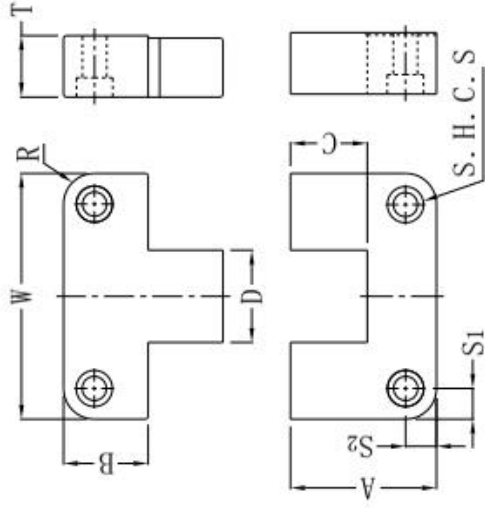

Code	W +.0000 -.0004	T +.000 -.002	A +.000 -.002	B +.000 -.002	C	D .0001/D002	R	S1/S2 0.01	安装螺丝 S.H.C.S	
USL37×100	1.000	.375	1.125	.875	.53	.500	.187	.250	#10-32 1/2"	
USL50×125	1.250	.490	1.125	.875	.66	.500	.187	.250	#8-32 5/8"	
USL50×150	1.500	.500	.875	.875	.56	.563	.187	.250	#8-32 5/8"	
USL50×200	2.000	.500	1.375	.875	.66	.750	.187	.312	#10-32 5/8"	
USL75×300	3.000	.750	1.875	.875	1.13	1.250	.250	.375	1/4-20 3/4"	
USL100×400	4.000	1.000	2.375	1.375	1.25	1.500	.500	.500	3/8-16 1"	
USL125×500	5.000	1.250	2.875	1.375	1.63	2.000	.500	.625	1/2-13 1-1/4"	
USL150×600	6.000	1.500	2.875	1.375	1.75	2.500	.500	.625	1/2-13 1-1/2"	

Code	W +.00 -.01	T +.00 -.05	A +.00 -.05	B +.00 -.05	L	D .002/D05	R	S1 .25	S2 .25	安装螺丝 S.H.C.S	@ ¥/S (税前价)
IS LM16X50	50	16	21.5	21.5	12	17	5	8	11	M6-1.0 18	
IS LM19X75	75	19	36	36	17	25	5	12.5	18	M10-1.5 20	
IS LM19X100	100	19	45	45	23	35	5	15	22	M10-1.5 20	
IS LM25X125	125	25	45	45	23	35	5	20.5	22	M10-1.5 25	